

EVU-3-63-ISL

Three-phase connection unit with 3 x 63amp single-phase isolators

The **EVU-3-63-ISL** from matt:e is a simple, single dedicated connection unit with built in **O-PEN** technology, which allows for the connection of 3 x 63amp single-phase loads to the existing PME earthing facility.

The unit incorporates a 5 pole isolator with built-in shunt trip which disconnects all poles including CPC in the event of a fault, manually resettable in line with BS:

7671:2018. Amendment 1: 2020.

Regulation 722.411.4.1 (iii)

The **O-PEN** technology does not require earth rods or measuring electrodes to function correctly.





Product Features

- Built in O-PEN technology
- Standard mild steel IP4X enclosure
- NO EARTH ELECTRODES REQUIRED
- Phase loss protection
- Built in 5 pole mains isolator with manually resettable shunt trip
- Standard 1 Year parts warranty
- Simple wire in wire out connection
- With 3 x 63amp double pole isolators
- Designed and Built in the UK

...Simplifying EV connection

EVU-3-63-ISL

Dimensions and Specifications

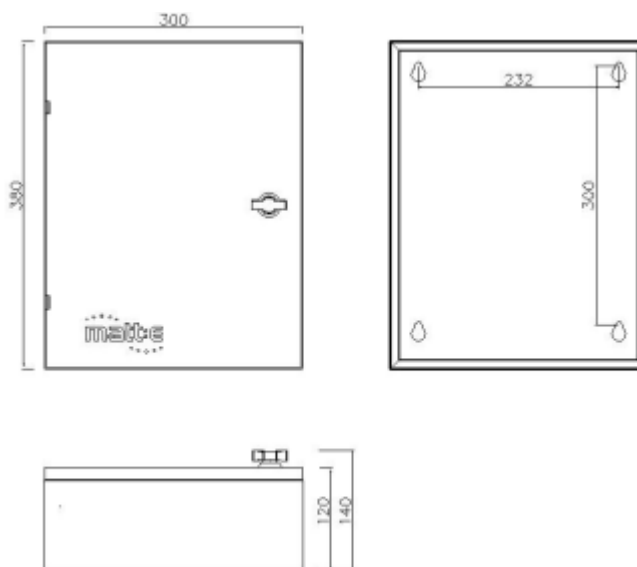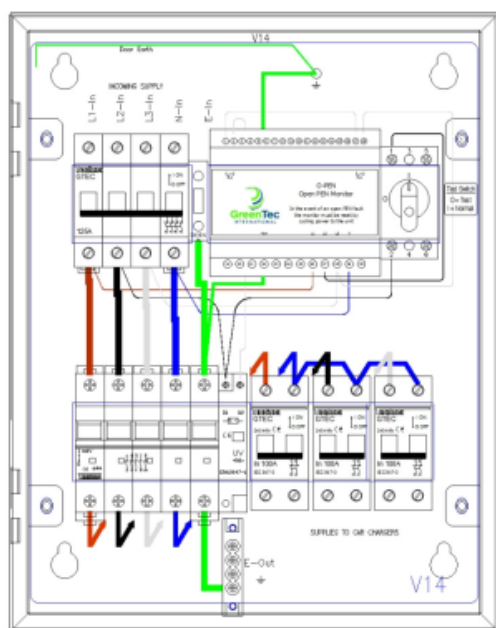

Description	Dedicated EV connection centre
Input Volts	Nominal input voltage three-phase 400V 50Hz
Max Load	63 amps per phase
Cable Entry Facility	Top or bottom
Terminal Capacity	Supply 50.0mm ² Load 25.0mm ²
Dimensions (H x W x D)	380mm x 300mm x 140mm
Weight	Approximately 7kG
Enclosure	Mild Steel Powder Coated
Ingress Protection	IP4X
Warranty	The matt:e EVU-3-63-ISL is guaranteed for a period of 1 year from the date of purchase. This warranty is limited to the replacement of faulty components only.

...Simplifying EV connection